

ADDENDUM NO. 1  
PIPESTONE COUNTY PROJECTS

**SAP 059-611-004**  
**SAP 059-613-016**  
**SAP 059-613-017**  
**SAP 059-613-018**  
**SAP 059-613-019**  
**SAP 059-613-020**  
**SAP 059-613-021**

March 28, 2018

Bid Date: April 3rd, 2018

This addendum modifies the original Request for Proposal. Acknowledge receipt of this addendum in the space provided below.

- Special Provision S-23.2 is hereby deleted and replaced with the following:

All in place bituminous pavements shall either be removed off of the project and disposed of at a location chosen by the Contractor and approved by the Engineer, or milled to 2" minus material and reused in place of Aggregate Base, Class 5 Mod. If the Contractor chooses to mill and reuse the bituminous pavement it will be paid for at the contract unit price for Aggregate Base, Class 5 Mod. The Contractor shall saw cut the bituminous joints at the removal limits shown on the plans or indicated by the Engineer to provide for a true and vertical face. Any additional removal beyond the limits shown shall be at the Contractors expense, including the cost of restoring the bituminous pavement. The cost of this additional work shall be included in the unit price bid for 2104.505 Remove Bituminous Pavement on Project SAP 059-613-021 and 2104.509 Remove Box Culvert on all other projects.


END OF ADDENDUM

**Please sign this sheet and return by fax to (507) 825-6712.**

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Company

This Addendum #1 is hereby approved and incorporated into the Request for Proposal and shall be considered part of project plans for SAP 059-611-004, SAP 059-613-016, SAP 059-613-017, SAP 059-613-018, SAP 059-613-019, SAP 059-613-020, SAP 059-613-021.

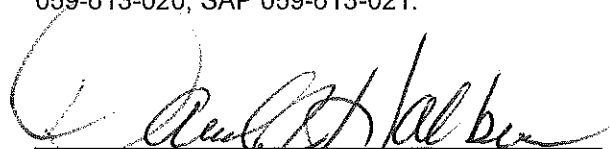

David J Halbersma, PE #19952